ROLLING SECURITY GRILLE

Long Life

Designed to perform with high daily usage.

Optional construction for high cycle applications.

Engineered Security

Constructed of solid 5/16" diameter horizontal aluminum rods on 2" centers with 1/8" aluminum hinged vertical connecting links (5/8" deep by 3 3/4" high) 9" on center.

Assured Quality

High quality extruded aluminum guides and bottom bars designed with thick wall construction make this a premium product that doesn't compromise.

Spectrum of Finishes

Mill, clear, or bronze anodized and powder coat in 180 standard colours.


Choice of Grille Construction


Standard for grilles up to 30' wide and heavy duty construction for grilles of all sizes in high usage areas.

Range of Operation

Push up, chain hoist, crank or motor.

Cylinder locking.




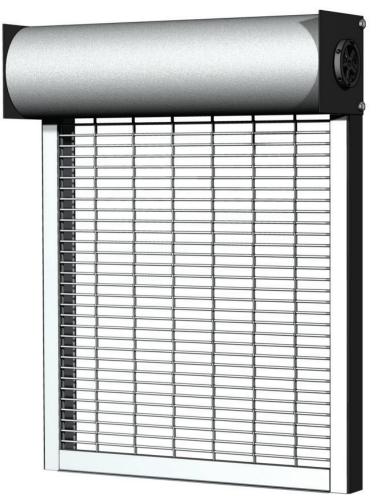





GRILLE DETAILS

TYPICAL DETAILS









BELT DRIVE MOTOR


GEARHEAD VERTICAL MOTOR

GUIDE DETAILS





AREA CHART

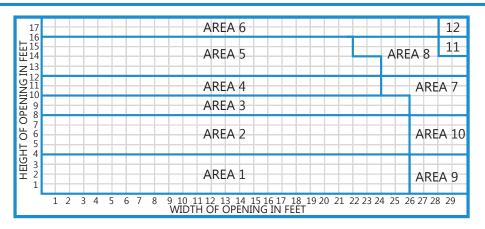

GRILLE CLEARANCE CHART

AREA	A	В	С	D	E	W	Х	Y
1	13"	14"	6″	6″	2 1/2"	2 1/2"	2 3/4"	3 1/2"
2	15"	16"	6"	6″	2 1/2"	2 1/2"	2 3/4"	3 1/2"
3	16"	17"	6″	6″	2 1/2"	3"	2 3/4"	3 1/2"
4	18"	16"	6″	6″	2 1/2"	3"	2 3/4"	3 1/2"
5	18"	19"	6″	8 1/2"	3″	3″	2 3/4"	4"
6	20"	21"	6″	8 1/2"	3″	3"	2 3/4"	5"
7	18"	19"	6″	8 1/2"	2 1/2"	3″	2 3/4"	3 1/2"
8	20"	21"	6"	8 1/2"	3″	3″	2 3/4"	4"
9	15"	16"	6"	8 1/2"	2 1/2"	3″	2 3/4"	3 1/2"
10	16"	17"	6″	8 1/2"	2 1/2"	3″	2 3/4"	3 1/2"
11	22"	23"	6″	8 1/2"	3″	3″	2 3/4"	4"
12	22"	23"	6″	8 1/2"	3″	3"	2 3/4"	5"

Contact SDI for larger grilles.

